



- ARS Research
- ARS People & Locations
- ARS Newsroom
- ARS Careers

You are here: [Pacific West Area Home](#) / [Northwest Irrigation and Soils Research](#) / [Research](#) / PAM Primer

Related Topics

- Programs and Projects
- Subjects of Investigation
- ARS National Programs
- Search for a research project
- PAM Research
- Sugarbeet Research
- Irrigation Research

PAM Primer

A brief history of PAM and PAM-related issues

R.E. Sojka and [R.D. Lentz](#)

Abstract

Irrigated crop production is critical to global agricultural output. Surface irrigation, mostly furrow irrigation, accounts for >60% of Earth's 600 million irrigated acres (240 million hectares). Erosion seriously threatens irrigation's ability to sustain its 2X yield advantage and 3X economic advantage over rainfed agriculture and risks serious environmental and food security consequences to earth's mushrooming human population. Furrow irrigation-induced erosion is nearly eliminated by small additions of water-soluble polyacrylamide (PAM) to irrigation water. PAM is an environmentally safe industrial flocculent widely used in municipal water treatment, paper manufacturing, food processing and other sensitive applications. On freshly cultivated furrows, 1 lb/acre (1 kg/ha) of PAM applied in the irrigation inflow at 10 ppm (10 g/m³) during water advance (only), reduced sediment in runoff 94% and increased net infiltration 15% in 3 yrs of Agricultural Research Service tests in Idaho on Portneuf silt loam soils (coarse-silty, mixed, mesic Durixerollic Calciorthids). PAM products are now registered throughout the western United States. The Natural Resources Conservation Service published a PAM-use practice standard in January 1995. In 1995, the first year of product commercialization, 50,000 acres (20,000 ha) of furrow irrigated land used PAM, halting an estimated 1 million tons (0.9 million metric tons) of erosion. With PAM-use, irrigation return flows have had reduced sediment, biochemical oxygen demand (BOD), total phosphorus, and various pesticides. Many irrigation farmers who have viewed traditional conservation practices as cumbersome, intrusive, or ineffectual, adopt PAM-use as an attractive inexpensive alternative. The typical \$15 to \$35/acre per crop (\$37-\$88/ha) costs, are partially or entirely retrieved by savings in erosion-related field operations, improved infiltration, water conservation, or crop responses. Pam-use in irrigation is expected to expand rapidly in 1996.

Introduction

Polyacrylamide treatment of irrigation water may be the fastest growing conservation technology in irrigated agriculture. PAMs were registered in most Western states by late 1994, and the Natural Resources Conservation Service (NRCS) published an interim conservation practice standard for PAM-use in January 1995 (Anonymous, 1995). In 1995, its first year of commercial use, about 20,000 ha were PAM-treated, saving as much as a million tons (0.9 million metric tons) of soil (Sojka and Lentz, 1996). Irrigators have been attracted to the new PAM technology because they recognize irrigated agriculture's value, the threat of erosion on fragile arid-zone soils, and PAM's efficacy and ease of use.

Significance of Irrigated Agriculture

About 600 million acres (240 million hectares) or 15-17% of Earth's cropland are irrigated, mostly surface irrigated (Hoffman et al., 1990; Gleick, 1993). In the United States about 32 million acres (13 million ha) of crop land (53% of the total) are surface irrigated, primarily by furrow (Anonymous, 1996). The proportion of surface irrigation globally is thought to be much higher than in the US, since most of the world's irrigated acres occur in underdeveloped countries that do not have the technologic base, rural power or financial resources to develop more advanced methods of irrigation such as sprinklers or drip.

Irrigation occurs mostly in arid climates (Bucks et al., 1990) where photosynthetic rates are high (few clouds), and disease, insect, and weed pressures are low. These factors minimize fungicide, herbicide, and pesticide inputs. Arid soils seldom need potassium fertilizer or lime; furthermore, their neutral to basic pH and low organic matter minimize required rates of soil-incorporated herbicides (Ross and Lembi, 1985).

Because water and nutrient availability, as well as pest control are more easily optimized under irrigation, irrigated commodities usually attain higher quality than with rain-fed production. Additionally, irrigation in arid environments allows commercial production of many high value horticultural and other cash crops that cannot be economically grown under rainfed conditions. Irrigated yields average twice that of rain-fed agriculture, accounting for 1/3 of all crop yield, and half of all crop value (Rangeley, 1987; Bucks et al., 1990). About 50 million hectares of Earth's best irrigated land grows 1/3 of her entire *food crop* (Tribe, 1994).

Erosion and Irrigated Agriculture's Sustainability

Irrigated agriculture's high productivity makes possible the feeding and clothing of Earth's exploding population on a minimum extent of arable land. Yet, the arid and semi-arid soils supporting most irrigated agriculture typically have thin erodible surface horizons. Furrow outflow soil losses of 2 to 22 tons/acre/yr (5 to 50 metric tons/ha/yr) are common in the U.S. Pacific Northwest, with 3 to 8 times the field average loss occurring near inflows (Berg and Carter, 1980; Kemper et al, 1985; Fornstrom and Borelli, 1984; Trout, 1996). Thus, irrigated agriculture's productivity is seriously endangered by arid soil erodibility, and irrigation-induced erosion (Carter, 1993). Some 1.2 billion acres (0.5 x 10⁹ ha) of grasslands, rain forests, or wetlands would be needed to replace irrigated agriculture's output if irrigation were eliminated (Sojka, 1996).

Numerous conservation practices for furrow irrigation have been developed since 1970 (Sojka, 1997). Several eliminate >80% of runoff-carried sediment. Yet, few of these practices have been widely adopted, even after two decades of promotion and demonstration. This is largely because residue placement, reduced tillage etc. are often regarded as inconvenient or intrusive by furrow irrigators, who prefer smooth clear furrows to convey water. Conservation practices that require additional or unfamiliar field operations that occur during otherwise busy periods in the farming schedule are also avoided. Furthermore, practices that reduce sediment loss 60-70% (like sediment ponds, vegetative filter strips or buried-pipe waste water systems) still lose most of the clay-sized solids (Brown et al., 1981), the soil component most critical to sustained soil fertility. These solids also are most linked to BOD, pesticide, and eutrophying nutrient problems in return-flow receiving waters.

PAM-use has proven highly effective for erosion control and infiltration enhancement, and is well received by furrow irrigators. This paper summarizes the background of this new technology and the results and insights obtained over several years of experimentation with small amounts of polyacrylamide (PAM) dissolved in irrigation water. We have also attempted to itemize important practical considerations for effective and environmentally responsible use of PAM for furrow erosion control.

PAM's Origins and Properties

Chemical soil conditioners were used as early as World War II to allow rapid construction of roads and runways under adverse conditions (Wilson and Crisp, 1975). The technology found its way into the US agricultural arena in the 1950s, with a variety of synthetic compounds, including various types of PAMs that were used to enhance aggregate stability of soil in the tilled surface layer of agricultural fields. Various uses for soil structure stabilization in horticultural, agronomic, and construction applications were extensively researched through the 1970s (Azzam, 1980; De Boodt et al., 1993; Gabriels, 1990).

"Polyacrylamide" and "PAM" are generic terms. PAMs are polymers made up of many repeating subunits (monomers). As with all polymers, the properties of PAMs are very dependant on the size of the polymer. A familiar analogy in nature is the way simple glucose monomers are progressively polymerized into polysaccharides, pectins, starches, and cellulose (wood). PAMs also vary in molecular size, depending on the number of acrylamide monomers (AMD) that are combined to form the polyacrylamide chain. In addition, PAMs can be altered through modification of some of the subunits.

The most common raw material for polyacrylamide synthesis is natural gas, a resource often burned off at petroleum well heads. The PAMs used in irrigation water to fight erosion are copolymers. They consist of high molecular weight polyacrylamide, typically 12-15 Mg/mole (>150,000 AMD monomer units per molecule), with substitution of functional groups in about one in five AMD monomer units (Fig. 1).

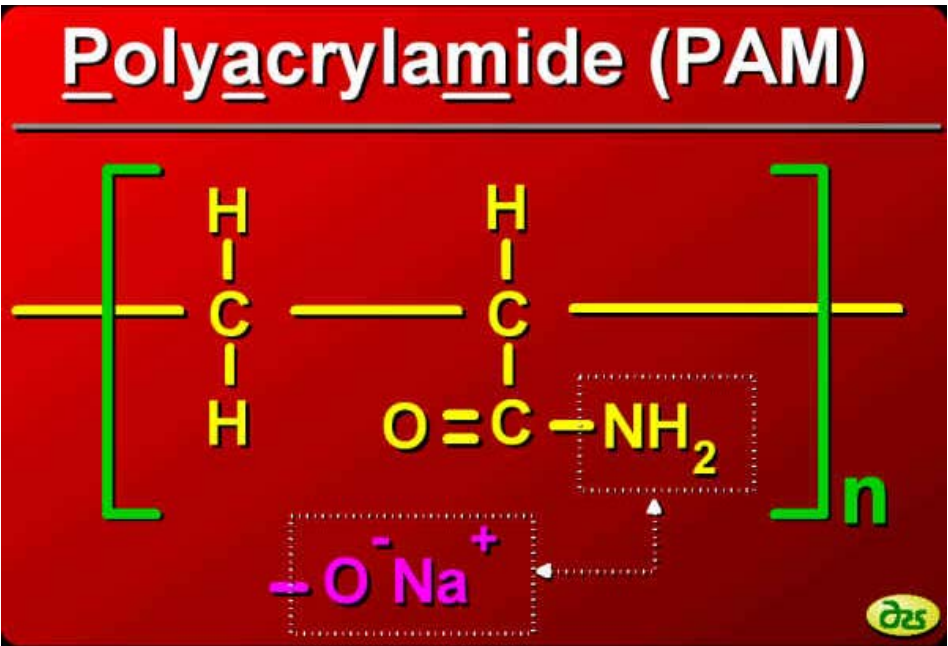


Figure 1 Depiction of an individual acrylamide monomer component as found in a polyacrylamide molecule. Substitution of the sodium formate functional group for the amide group, as occurs in about one in five polymer units is shown. This is the substitution that, when sodium dissociates from the copolymer chain, provides a net negative charge on the "PAM" molecule.

This imparts a net negative charge. The PAMs used in the Idaho work typically had a negative charge density of about 18% (ie substitutions in about 1 of every 5 monomers). In these PAMs, one in five amide groups is replaced with sodium formate. The sodium cation dissociates in water, leaving a negative charge on the polymer for each cation dissociated.

In its original mode of use forty years ago, PAM or other soil stabilizers were applied at rates of 500 to 1000 lbs per acre (560-1120 kg/ha). They were usually sprayed onto soil, and rototilled or otherwise incorporated. Sometimes multiple applications were necessary to achieve the application level required to stabilize the soil aggregates created in the tillage process. The concept was to improve the tillage layer's soil structure and stability. The application rates needed to achieve stabilization of this volume of soil proved uneconomical for all but high value uses.

Numerous laboratory column studies and lysimeter studies were conducted in the 1970s and 1980s to study PAM effects on soil dispersion, PAM adsorption-desorption phenomena, and infiltration effects. During this period the chemistry of polyacrylamide synthesis and copolymerization continued to improve, broadening the choices of polyacrylamide copolymers available for use. Since the early 1980s, several papers have reported infiltration and erosion effects from rain-simulator studies where soil was pretreated with PAM.

Effects of a soil conditioner placed in furrow irrigation water was first reported by Paganyas (1975). The report referred only vaguely to the conditioners as "K" compounds, although their description suggests they were PAM-like chemicals. Small amounts placed in the advancing furrow stream were used to pretreat the furrow. After pretreatment the furrows were irrigated, with great reductions in erosion. Mitchell (1986) reported use of anionic PAMs applied during the stream advance phase of furrow irrigation at rates of 25, 50, and 150 ppm. His focus was on infiltration effects, but in a side observation he noted that soil dispersion was reduced and runoff was nearly clear in PAM-treated irrigation furrows.

Lentz et al. (1992) gave the first detailed report of PAM-use in furrow irrigation for erosion control and net infiltration improvement. Their approach, like Mitchell's in 1986, involved PAM treatment of the furrow advance stream (only). Efficacious treatment was possible with net PAM application rates of only about 1 lb/acre (1 kg/ha) applied in the advance stream (only) at 10 ppm. McCutchan et al. (1993) reported similar findings, although their approach involved application of PAM at 2.5 ppm continuously throughout the irrigation.

The very small total amounts of PAM needed to achieve desired results, when applying PAM in the eroding irrigation stream has proven to be a significant breakthrough. Applying PAM in the furrow water is effective at low rates because only the thin layer of soil immediately affected by the dispersion and sheer of the furrow stream is treated by water infiltrating into the soil (Fig. 2).

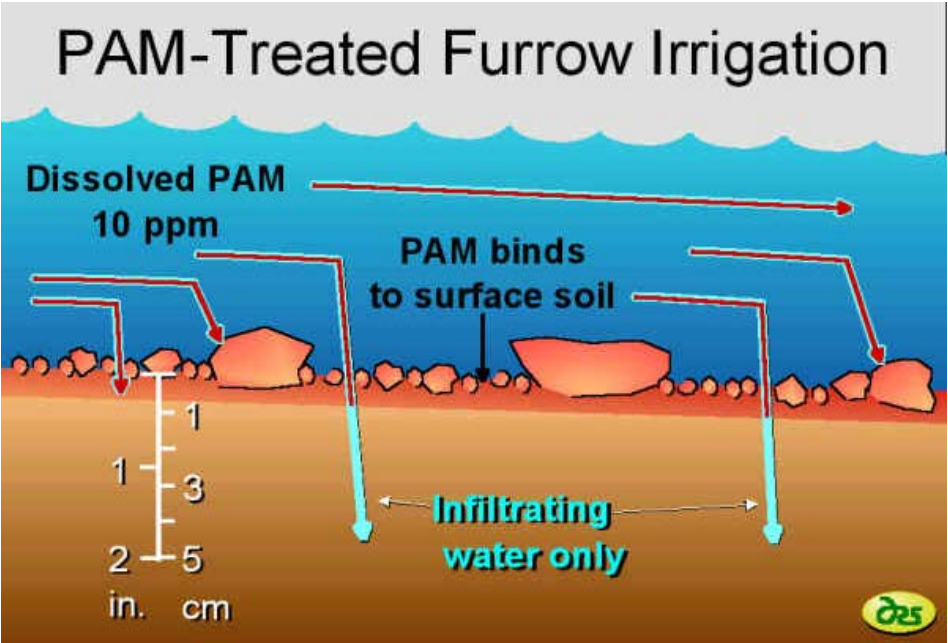


Figure 2 Schematic depiction of PAM deposition from treated water onto soil aggregates in the surface few millimeters of soil in an irrigated furrow.

A simple calculation demonstrates how such low rates can be effective. Based on the old PAM application rates of 500 lbs/acre incorporated in the tillage layer (surface 6 inches, or 15 cm), the fact that water in furrows only wets about 25% of the field surface area, and that PAM only penetrates about 1/16" (1-2 mm) into the soil, we see that:

$$(500 \text{ lbs/acre}) (25\%) (1\%) = 1.25 \text{ lbs/acre}$$

The potential of creating significant changes in soil response to irrigation water application with such small amounts of PAM is what has driven the development of this new technology.

General Methodology

The findings discussed herein were obtained largely from a series of studies conducted from 1991 through 1995 at or near the USDA Agricultural Research Service's Northwest Irrigation and Soils Research Laboratory in Kimberly, Idaho. Soils included Xerollic Haplargids and Haploxerollic Durargids, but most studies were on Portneuf silt loam (coarse-silty, mixed, mesic Durixerollic Calciorthids). Surface horizons and general physical and chemical characteristics of all soils were similar. Textures were silt loams (10-21% clay, 60-75% silt). Organic matter ranged from 10-13 g/kg. Saturated paste extract EC was 0.7 to 1.3 dS/m, ESP was 1.4 to 1.7, pH was 7.6-8.0 with CaCO₃ equivalent of 2-8%. Slopes varied from 0.5 to 3.5%, but unless noted otherwise, data generally reflect slopes of 1 to 1.5%.

Water was applied as furrow irrigation (usually either via spigoted plastic pipe or siphon tubes) to conventionally tilled fields, usually disked in Autumn and Spring, then roller harrowed following incorporation of fertilizer and herbicides prior to planting. Furrows ranged from 570 to 860 feet (175 to 264 meters) in length; they varied from 4 to 8 inches (10 to 20 cm) in depth, depending on crop grown, and were prepared with weighted 75 shaping tools. Furrow spacing varied with crops, which included edible dry beans (*Phaseolus vulgaris*) @ 22 inches (56 cm), corn (*Zea mays*) @ 30 inches (76 cm) and potato (*Solanum tuberosum*) @ 36 inches (91.5 cm). Irrigation was normally on every other furrow only, usually in wheel-track furrows. Per hectare sediment-loss and infiltration were calculated based on the spacing between irrigated furrows. Irrigation water was withdrawn from the Twin Falls Canal Company⁽²⁾ system and had an electrical conductivity (EC) of 0.5 dS/m and a sodium adsorption ratio (SAR) of 0.4 to 0.7. Net infiltration, runoff, and sediment-loss measurements were accomplished by use of periodic flow monitoring and sampling and automated data analysis similar to methods described in detail elsewhere (Sojka et al. 1992 and 1994, Lentz and Sojka, 1994a and 1995).

Polyacrylamide (PAM) copolymer used, unless noted otherwise, was a dry granular material having an approximate molecular

weight of 12-15 Mg/mole, with an 18% negative charge density, manufactured by CYTEC Industries of Wayne, NJ. It is marketed in the US by American Cyanamid Company under the trade name Superfloc 836A. Numerous similar materials, granular, compressed cakes, high concentrate aqueous solutions and oil-emulsified PAM concentrates are widely available world wide. Unless noted otherwise, our most frequent means of application involved preparation of liquid stock solutions of 1200-2400 ppm (g/m³) concentration which were metered into furrow stream flows to achieve a concentration of 10 ppm (g/m³) in the advancing water flow before runoff began. Typical flow rates ranged 3.5 to 10 gpm (13 to 38 L/min) during advance, reduced to 3.5 to 6 gpm (13-23 L/min) at initiation of runoff.

Conservation Benefits, Mode of Action and Cost

Polyacrylamide (PAM) has been an effective, economical erosion preventative under a variety of field conditions (Fig. 3) when dissolved at 10 ppm (g/m³) in the advance phase (only) of furrow irrigation inflow streams (Lentz et al., 1992; Lentz and Sojka, 1994b; Lentz, 1995). PAM copolymers with molecular weights of 12-15 Mg/mol and charge densities of 8-35% are most effective.

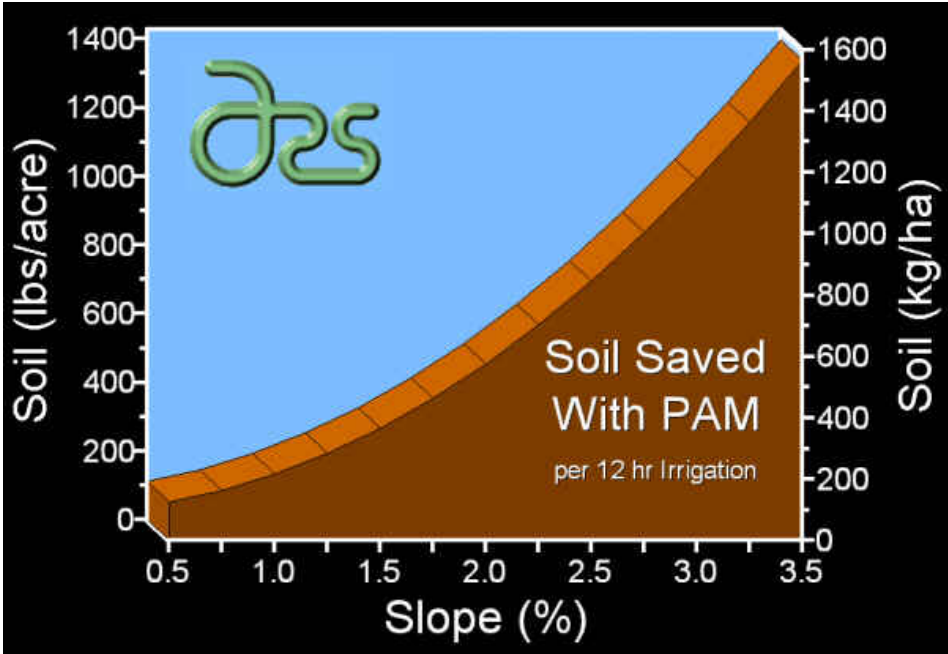


Figure 3 Estimate of soil saved as a function of slope for twelve hour irrigations on Portneuf silt loam using inflows of 23-38 L/min for an approximately 200 meter long field.

Advancing furrow streams containing 10 ppm (g/m³) PAM provided a 94% reduction in runoff-sediment in three years of tests in Idaho (Lentz et al., 1992; Sojka and Lentz, 1993; Trout and Lentz, 1993; Lentz and Sojka, 1994b, Sojka and Lentz, 1993, 1994a). With PAM-use, sediments were retained on fields, even with conventional clean-tillage, using no other conservation practices (Lentz and Sojka, 1994b). PAM is a potent flocculent that effectively retains nearly all clay-sized material.

PAM, used according to the NRCS practice standard (Anonymous, 1995), increased infiltration 15% on Portneuf silt loam (Lentz et al, 1992, Trout and Lentz, 1993; Lentz and Sojka, 1994b; Trout et al., 1995; Sojka et al., 1996) and up to 50% on finer textured soils (McCutchan et al., 1994). PAM can increase initial infiltration on swelling soils, but may not always affect net infiltration of prolonged irrigations since subsoil swelling blocks water entry as an irrigation proceeds (Mitchell, 1986). Because PAM-treated furrows did not "down-cut" (ie. erode a deeper channel), water infiltrated in Idaho tests moved 25% further laterally from 4 inch (10 cm) deep furrows between level soil beds (Lentz et al., 1992). Thus PAM-use can save water in early irrigations when only enough needs to be applied to reach planted seeds or young seedlings.

The most effective and environmentally safe PAMs are large negatively charged molecules (Lentz et al., 1993, Barvenik, 1994). It has been suggested that divalent cations in water bridge the PAM and soil, increasing soil cohesion and strengthening aggregates contacted in the furrow (De Boodt et al., 1990; Barvenik, 1994, Sojka and Lentz, 1994b). Soil particles at the furrow's soil-water interface are bound together, preventing detachment and transport of sediments in runoff. Soil erodibility is reduced by improved inter-aggregate bonding and by protecting surface roughness. PAM only penetrates soil 1 to 2 sixteenths of an inch (a few millimeters) in the furrow (Malik et al., 1991). These, however, are the few millimeters critical to the erosion process. Since the wetted perimeter only exposes about 25-30% of the soil surface to flowing water, PAM's properties are effective at very low application rates, typically 1 lb/acre (0.9 kg/ha.)

PAM is a settling agent. It flocculates (clusters together) dispersed clay and silt particles carried in the turbid flow, enabling them to settle to the furrow bottom in a loose pervious layer. Flocculation reduces the amount of suspended fines that enter and plug pores, decreasing infiltration in untreated sediment-laden water. Pore aperture maintenance was confirmed in treated furrows by higher infiltration rates under tension compared to controls (Ross et al., 1996). Higher net infiltration decreases runoff rate and amount, further reducing stream force, carrying capacity, and transport volume.

PAM's large molecular size slightly increases the viscosity and surface tension of water (Malik and Letey, 1992). It may also induce laminar flow near the soil-water interface. Further research needs to determine the extent to which these changes affect propagation and transfer of shear forces causing detachment of soil particles.

PAM is used most often as follows (Anonymous, 1995): One of several registered polyacrylamide copolymer products is used. These PAM copolymers are large molecules, containing >150,000 monomer units per molecule. They typically have 18% negative charge density. U.S. products contain <0.05% free (unreacted) acrylamide monomer by weight (<0.025% in Europe).

These water soluble PAMs are metered into irrigation supply ditches, either as concentrated stock solutions, or as dry granules. If dry granules are metered into the flow, one must also provide turbulence in the head ditch just below the point of PAM addition to promote uniform PAM dissolution and distribution. Supply-ditch PAM concentration is brought to 10 ppm (10 g/m³) (Lentz et al., 1995). The 10 ppm (10 g/m³) water is delivered to dry furrows at inflow rates that rapidly advance water across the field.

It is essential that no untreated water wet the furrow ahead of the PAM-treated flow. Untreated water destroys soil structure of erodible soils before PAM-treatment, greatly reducing PAM's effect. Wet furrows also reduce infiltration of PAM-treated water through the soil-water interface, delivering less PAM to the thin layer of soil along the wetted perimeter. This reduced application efficiency may also increase PAM-loss, increasing cost and the risk of delivering PAM to non-targeted waters.

When water reaches the end of the furrow, introduction of PAM into the head ditch is stopped. Untreated water is used for the balance of the irrigation. In most production fields the advance period consists of about the first quarter of a total irrigation period, which typically lasts either 12 or 24 hours. When runoff begins, it is recommended that inflows be reduced to the least needed to sustain a minimal runoff rate.

In five years of testing in Idaho, this application method has required about 1 kg/ha of PAM per treatment (Lentz and Sojka, 1994b, Lentz and Sojka, 1996ab). If furrows are undisturbed between irrigations, erosion protection declines about 50% per untreated irrigation (Lentz et al. 1992). Furrows disturbed by traffic or cultivation must be retreated at the 10 ppm (10 g/m³) rate during inflow advance. Undisturbed furrows typically erode less late in the season (Brown et al., 1995). Vegetation often intrudes into furrow bottoms late in the season. Shading of furrows slows UV deterioration of PAM and physical destruction of polymer bonds caused by soil shrinking and swelling.

Season-long application requirement varies with crop, cultural practices, and growing season length (number of irrigations). Typically 3 to 7 treated (@ 1 lb/acre or 0.9 kg/ha) irrigations will provide excellent seasonal erosion reduction. Granular PAM is available to farmers for \$4/lb to \$5.50/lb (\$9/kg to \$12/kg). PAM head ditch applicators can be purchased for a few hundred dollars each. Seasonal costs are low enough to be attractive to most farmers. In addition, costs are offset by eliminated need to construct sediment retention basins, or at least, reduced basin maintenance, and enabling all or some of the area used for settling basins to be returned to production. Furrow reshaping (cultivation), at \$3.50/acre to \$7/acre (\$9/ha to \$18/ha), is often eliminated.

Environmental Considerations

Environmental regulation, safety and toxicity issues were reviewed by Seybold (1994) and Barvenik (1994) and are addressed in this proceedings in papers by Deskin (1996) and Barvenik et al. (1996). In the U.S., anionic PAMs are used extensively in potable water treatment, for dewatering of sewerage sludges, washing and lye peeling of fruits and vegetables, clarification of sugar juice and liquor, in adhesives and paper in contact with food, as thickeners and suspending agents in animal feeds, in cosmetics, for paper manufacturing, for various mining and drilling applications and for various other sensitive applications. No significant negative impacts have been documented for aquatic, edaphic or crop species for PAM applied at recommended concentrations and rates.

It is important to emphasize the need to use **anionic** PAMs in these applications. Neutral PAMs and especially cationic PAMs have been shown to have LC₅₀s low enough for concern to certain aquatic organisms, whereas anionic PAMs have not. Cationics are attracted to the hemoglobin in fish gills. Suffocation occurs when fish are placed in otherwise clean waters that contain low levels of cationic PAM. It should be noted, however, that when PAMs are introduced into waters containing sediments, humic acids, or other impurities, the effects of the PAMs on biota are greatly buffered (Buchholz, 1992; Goodrich et al., 1991).

PAMs require registration as an irrigation applied soil amendment in most states. The PAMs registered for these uses are usually required to contain no more than 0.05% free acrylamide monomer as a contaminant. The acrylamide (AMD) monomer is a neurotoxin, but at these levels anionic PAMs are approved for a variety of sensitive uses where the high purity PAM is held below various concentration thresholds in the regulated processes.

Since early in the PAM erosion program, significant effort has been exerted to assure that loss of PAM from target fields is minimized, and to determine that any loss that did occur would not result in unacceptable levels to receiving riparian waters. Lentz et al. (1996) developed a sensitive flocculation assay to determine PAM concentrations in surface waters at concentration as low as 0.25 ppm. Subsequently the assay was employed to follow the amounts of PAM lost from treated fields.

Lentz and Sojka (1996b) determined that when applied according to the NRCS standard, PAM losses did not exceed 5% of applied amounts. Furthermore, the small amount lost from fields was adsorbed onto suspended sediments encountered in return flows (continued flocculation) and onto exposed surfaces of return-flow ditches. PAM concentrations fell below detectable limits in 300-1500 feet (100 to 500 meters) of travel in tail water ditches, depending on seasonal factors.

Barvenik (1994) stated "...dry anionic PAMs of the type that are effective in soil systems show no toxicity to fish (LC₅₀ >100 mg/L)." It should be emphasized that the LC₅₀ did not equal 100 mg/L, but rather, was undetermined, because fifty percent lethality never occurred in that concentration range. Hence, the "greater than" symbol is used to indicate that a relatively high threshold of tolerance exists, and that further tests at higher concentrations were not conducted to find the lower limit.

In assessing the risk of PAM-loss to return-flow riparian receiving waters, several facts are apparent. The 10 ppm PAM concentration recommended in the NRCS standard for treatment of the advancing stream is itself one tenth the reported >100 mg/L value. The *average* PAM concentration of waters leaving a field from a 24 hr irrigation is 1/1000 the >100 mg/L value, or about 0.1 ppm, which is actually below the current detectability of PAM in natural waters. These calculations assume following the NRCS PAM application standard of 1 lb per acre applied in the stream advance only, with irrigation water applied at a rate of 200 gpm over the course of the irrigation, and assuming a 5% loss of applied PAM. Furthermore, if 10% of irrigation inflows in a watershed were PAM treated that implies that the average concentration of PAM would be 0.01 ppm in return flows (or 1/10,000 the >100 mg/L value).

As stated earlier, data has shown that PAM continues to adsorb to surfaces and to flocculate suspended particulates in tailwater streams. In reality, other non-agricultural (ie. non-treated) inflows will further dilute these values.

Regarding concern for AMD content, the same simple dilution scenario would limit AMD concentration to 0.000005 ppm in return flows, where 10% of all inflows were being treated on a given day. It should be noted that AMD has been shown to decompose

rapidly in biologically active systems. Numerous citations to this effect were reviewed by Barvenik (1994). This suggests AMD concentration would be further reduced beyond the effects described above.

Decomposition of both polyacrylamide and acrylamide monomer in soil and water systems has been previously reported and were also reviewed by Barvenik (1994). Both compounds are susceptible to varying degrees of biological and photochemical degradation. In addition the large polyacrylamide molecule is slowly degraded by physical breakage due to mechanical forces such as abrasion, freeze-thaw action, and particle shrinking and swelling. Acrylamide monomer, which is strictly limited by U.S. regulation in these PAMs to no more than 0.05% by weight, decomposes in hours in soils and water. Polyacrylamide in bulk soil systems has been reported to decompose at a rate of about 10% per year (Azzam et al., 1983). These are probably conservative estimates for PAM applied only at the furrow surface.

Since furrow irrigation-applied polyacrylamide remains unincorporated into the soil volume for a prolonged period after application, UV radiation is high and mechanical effects are intensified. These are actually the primary degrading factors once soil micro-organisms have removed the easily metabolized amide functional groups as a nitrogen source. Finally, because the amide functional group is rapidly metabolized as a nitrogen source by soil microbiota, further breakdown of the polyacrylamide molecule does not produce a renewed source of acrylamide monomer. Others have also stated that breakdown of polyacrylamide to release acrylamide is thermodynamically impossible (MacWilliams, 1978). Finally, recent work has shown that polyacrylamide application following the NRCS standard does not adversely affect soil microbial processes or population dynamics (Watwood and Kay-Shoemaker, 1996; Kay-Shoemaker and Watwood, 1996). Furthermore, acrylamide monomer is not absorbed at detectable levels into harvested plant tissue, even when applying polyacrylamide at rates of 1000 lb/acre (Barvenik et al., 1996)

Halting erosion prevents exposure in furrow bottoms of soil not treated with herbicides, thus reducing potential late-season weed problems. Applied pesticide and fertilizer inputs are better retained on the field, with less loss by erosion to receiving waters or riparian areas (Agassi et al., 1995; Singh et al., 1996; Bahr et al., 1996; Bahr and Steiber, 1996). Because virtually no soil is suspended in flowing water, the runoff contains far lower nutrient and pesticide levels, furthermore the reduced organic substrate greatly lowers BOD (Lentz and Sojka, 1994b; Bahr et al., 1996).

PAM was used to increase furrow inflows while still controlling erosion (Sojka et al. 1995; Sojka and Lentz, 1996). This reduced water advance time, allowing more uniform infiltration from upper to lower field ends, improving potato yield and grade and reducing the risk of nitrate leaching from over-irrigation of the upper reaches.

Important User Considerations

For the farmer-user, it is useful to synthesize these numerous observations into a concise list of considerations. These considerations are itemized below. For better understanding of some of the statements listed, it may be necessary to read additional papers presented or cited in these proceedings. Several user-oriented publications are available to help farmers implement PAM application (Sojka and Lentz, 1994b; Lentz et al. 1995; Lentz and Sojka, 1996cdef). Farmers should also be familiar with the current NRCS application standard (anonymous, 1995).

1. Purchase only polyacrylamide (PAM) labeled for this use by your state (if registration and labeling are required). Purchasing from known reputable agricultural chemical suppliers may avoid acquiring ineffective or dangerous formulations inappropriate for this use.
2. By law, irrigation PAMs should contain no more than 0.05% free acrylamide monomer (AMD) by weight (in Europe, no more than 0.025%). The specific PAM copolymer formulation should be anionic (**NOT cationic**). The charge density may vary from 8-30 %; a value of 18% is typical. Molecular weight can vary, but higher molecular weights are usually more effective than lower for equal amounts of material applied and result in less AMD application for equal erosion control. Recent literature suggests that molecular weights of 12-15 Mg/mole are optimal.
3. The PAMs designated for this use are regarded as "water soluble" or "linear" or "non-crosslinked" PAMs. **Do not** purchase "crosslinked" or "super water-absorbent" PAMs for use in irrigation water. The latter do not act the same as linear PAMs in water or in the soil, and they have a different function and purpose.
4. The PAM you purchase should have a reasonably high analysis. PAMs purchased as dry "granular," "bead" or "powder" from reputable chemical companies will usually contain 80% or higher active ingredient (ai). Remember that what you pay for as PAM depends on the amount of active ingredient purchased. You may be purchasing convenience of application or some other consideration if the active ingredient content is lower, but be aware of how much you are spending on PAM per se.
5. As of this writing, PAMs come formulated for use in four major forms, dry bead or "powder" (>80 % ai), predissolved aqueous concentrate (usually around 3% ai), compressed blocks or cubes (> 80 % ai) for suspension in flowing ditches or furrow streams, oil-emulsified concentrates (usually 30% ai). Each form has various advantages and drawbacks.
 - o **Powders** are easy to store, transport and meter into head ditches, but require vigorous agitation to make them dissolve. Numerous inexpensive metered powder applicators are available. Powder applicators should be placed on the head ditch immediately above a source of substantial turbulence. Location of the applicator on the head ditch a 100 to 300 ft above the first irrigated furrow provides mixing opportunity. Powder applied in turbulent fountains with weed screens must apply the PAM below the screen on the outflow side to avoid clogging the screens. Placement of powder patches directly in furrows has been successful for erosion control, but infiltration effectiveness and on-field PAM retention are not yet thoroughly understood. Patches can be buried or broken up and washed downstream, or missed by the stream flow depending on siphon, spigot, or gate stream size, pattern and impact point.
 - o **Aqueous Concentrates** are limited as to the strength of concentrate that can be prepared before viscosity impairs practical use. The main advantage of ACs is better dissolving in stock solutions or in the head ditch than powders. The disadvantage is unknown storage effects and low ai for weight and volume of material handled.
 - o **Blocks and Cubes** are easy to handle and place, but do not dissolve uniformly. Cubes placed in furrows can wash downstream. Erosion and infiltration performance has been more variable than with other application methods.
 - o **Emulsified Concentrates** provide the same advantages as ACs, but achieve ten times the ai, greatly reducing volume and weight transport considerations. ECs also have much lower viscosity than ACs, despite their higher ai. ECs may be suitable for individual furrow application via a drip line at the upper field end; current tests are underway but are not yet conclusive. Shelf life and storage conditions may be factors for adverse climates. Metering is somewhat simplified, but temperature related viscosity changes may affect calibration in some areas and at some times in the season.

6. Be aware that, although all PAMs are polymers, **NOT ALL POLYMERS ARE PAM**. The media's recent high interest in PAM and the many stories reporting the effectiveness of PAM have often referred to the PAM only as "polymer" or as "the polymer." This has encouraged some entrepreneurial exploitation of the word "polymer" in the agricultural community. The results achieved with the specific class of PAMs described above are not known to be achievable with other affordable chemical polymers.
7. When applying PAM to furrows, the first drop of water to reach the furrow should already be at the recommended 10 ppm concentration. If dry soil first becomes wet by contact with untreated water, the soil structure and pore geometry will be severely degraded almost immediately. PAM flowing down the furrow only a few seconds later will have a greatly diminished ability to reduce erosion or improve infiltration. PAM can stabilize existing structure, but it cannot create structure. Similarly, PAM cannot remediate existing soil structure damage from other effects such as compaction etc. It has also been observed that when soils are damp (e.g. following a rain shower), or if the soil water content is higher than normal for an irrigation, PAM effectiveness is reduced. This is probably because of reduced infiltration of the PAM-treated water that normally carries PAM to surface aggregates. It is also possible that damp soil (water films on aggregates) prevents intimate adsorption of PAM under these conditions.
8. If water in the head ditch is high in sediments, application of PAM to the head ditch may settle enough sediment in the ditch to cause problems. Farmers with consistently high sediment concentrations in their water supply have had good success with creation of small sedimentation ponds at the upper end of the field to catch sediment immediately below the point of PAM application to the supply stream. This prevents overflow of head ditches and clogging of siphon tubes. If sediment load is particularly high, the PAM application rate may need to be slightly increased to compensate for deactivation of PAM by the flocculated sediment. Some farmers claim that cutting the PAM concentration in the head ditch to 5 ppm in the presence of high sediments gives the desired performance in the furrow, but reduces sedimentation in the head ditch. The rationale is that the optimal concentration for flocculation is higher than for erosion control. None of these approaches has been studied in controlled experiments. The use of in-furrow application methods (cubes, powder-patches, drip lines) help spread inflow sediment on the field where it causes fewer problems.
9. To date, published data confirm that use of 10 ppm in the advancing furrow stream (only) provides the greatest erosion control with the least PAM used and the least PAM lost from the treated field. Low rates of PAM continuously applied may be more costly, and lead to environmental risks in some situations. Farmers should also note that too high a PAM concentration, or too much PAM applied can eventually seal furrows, limiting infiltration. At very high concentrations PAM can stabilize suspension of particulates, rather than flocculating them. Therefore, farmers are strongly encouraged to adhere to the NRCS standard, and to be very cautious in their approach when local conditions prompt attempts to deviate from the standard.
10. Because PAM alters surface sealing, resulting in more pervious seals, the net infiltration rate of PAM-treated fields will be higher than in untreated fields. Farmers will need to increase their inflow rates to prevent furrow stream advance times from becoming excessively long. Farmers are strongly encouraged to take advantage of PAM's erosion preventing properties to GREATLY increase inflow rates (2 to 3 times). Doubling or tripling inflows will greatly reduce stream advance times and significantly improve infiltration uniformity while still greatly reducing erosion. NOTE HOWEVER, that to take best advantage of this new management option provided by PAM, the farmer should also cut back inflow rates to the minimum sustainable inflows once water has advanced and runoff begins. This is a higher order of management, but data confirm that crops sensitive to irrigation uniformity, such as Russet Burbank potatoes, can see significantly increased yield and quality, providing a substantial economic incentive for the change in management.

Conclusions

PAM-use for erosion control can be a formidable tool for achieving agricultural sustainability. It provides a potent environmental benefit. It halts furrow irrigation erosion by about a half ton of soil per ounce (16 kg/g) of PAM used. It removes most sediment, phosphorus and pesticides from return flows, and greatly reduces return flow BOD. It increases infiltration, enabling water conservation. Reduced sediment and nutrient loading of riparian areas can ultimately be expected to reduce the frequency and intensity of algal blooms, reduce turbidity and sedimentation of stream bottoms, decelerate reservoir sedimentation and wear on hydropower machinery.

PAM-use allows changes in furrow management that should provide more uniform water application. Coupling PAM-use with improved water management (e.g. accelerated inflow advance to improve field infiltration uniformity) is expected to reduce leaching of applied nitrates and to increase crop quality and net returns.

Detailed cost analyses of PAM-use are not yet available, but we do know that expenses related to furrow reshaping and sediment pond or ditch cleaning are reduced. PAM-use also conserves fuel, lessens air pollution, and reduces equipment wear and labor.

Perhaps most importantly, farmers have been enthusiastic in their adoption of this new practice. Because there is enthusiasm for the practice, its potential for implementation and, hence, erosion and pollution reduction is particularly promising.

Literature cited

1. Agassi, M., J. Letey, W.J. Farmer, and P. Clark. 1995. Soil erosion contribution to pesticide transport by furrow irrigation. J. Environ. Qual. 24:892-895.
2. Anonymous. 1995. National Resources Conservation Service West National Technical Center Interim Conservation Practice Standard--Irrigation Erosion Control (Polyacrylamide)--WNTRC 201-1. 5 pages.
3. Anonymous. 1996. 1995 Irrigation survey reflects steady growth. Irrig. J. 46:24-39.
4. Azzam, R.A.I. 1980. Agricultural polymers, polyacrylamide preparation, application and prospects in soil conditioning. Comm. Soil Sci. Plant Anal. 11:767-834.
5. Azzam, R., O.A. El-Hady, A.A. Lofty, and M. Hegala. 1983. Sand-RAPG combination simulating fertile clayey soils, parts I to IV. Int. Atomic Energy Agency. SM-267/15:321-349.
6. Bahr, G., T. Steiber and K. Campbell. 1996. Reduction of nutrient and pesticide loss through the application of polyacrylamide in surface irrigated crops. Proc. 6th Annual Nonpoint Source Water Quality Monitoring Results Workshop. Boise State University, Boise ID. Jan. 9, 10 & 11, 1996.
7. Bahr, G., and T. Steiber. 1996. Reduction of nutrient and pesticide loss through the application of polyacrylamide in surface irrigated crops. Proc. Managing Irrigation-Induced Erosion and Infiltration with Polyacrylamide. College of Southern Idaho, Twin Falls, ID. May 6, 7 & 8, 1996.
8. Barvenik, F.W. 1994. Polyacrylamide Characteristics related to soil applications. Soil Sci. 158:235-243.

9. Barvenik, F.W., R.E. Sojka, R.D. Lentz, F.F. Andrawes, and L.S. Messner.1996. Fate of acrylamide monomer following application of polyacrylamide to cropland. *IN* (R.E. Sojka and R.D. Lentz, eds) Proceedings: Managing irrigation-induced erosion and infiltration with polyacrylamide. College of Southern Idaho, Twin Falls, ID 6-8 May, 1996.

10. Berg, R.D., and D.L. Carter. 1980. Furrow erosion and sediment losses on irrigated cropland. *J. Soil Water Conserv.* 35:367-370.

11. Brown, M.J., J.A. Bondurant and C.E. Brockway. 1981. Ponding surface drainage water for sediment and phosphorus removal. *Trans. ASAE.* 24:1478-1481.

12. Brown, M.J., D.L. Carter, G.A. Lehrs, and R.E. Sojka, 1995. Seasonal trends in furrow irrigation erosion in southern Idaho. *Soil Technology.* 8:119-126.

13. Buchholz, F.L. 1992. Polyacrylamides and poly (acrylic acids). in Ullmann's encyclopedia of industrial chemistry, vol. A21. B. Elvers, S. Hawkins and G. Schulz (eds.). VCH, Weinheim, Germany (Federal Republic), pp. 143-156.

14. Bucks, D.A., T.W. Sammis, and G.L. Dickey. 1990. Irrigation for arid areas. pages 499-548. *IN* Management of Farm Irrigation Systems. G.J. Hoffman, T.A. Howell, and K.H. Solomon (eds.). Am. Soc. Ag. Eng. St. Joseph, MI.

15. Carter, D.L. 1993. Furrow erosion lowers soil productivity. *J. Irrig. Drain. Eng. ASCE.* 119:964-974.

16. De Boodt, M.F., M.H.B. Hates, and A. Herbillon (eds.). 1990. Soil Colloids and Their Associations in Aggregates. NATO ASI Series B: Physics Vol. 215. 598 pages. Plenum Press, NY.

17. Deskin, R. 1996. Product stewardship considerations in the use of polyacrylamides in soil erosion. *IN* (R.E. Sojka and R.D. Lentz, eds) Proceedings: Managing irrigation-induced erosion and infiltration with polyacrylamide. College of Southern Idaho, Twin Falls, ID 6-8 May, 1996.

18. Fornstrom, K.J., and J. Borelli. 1984. Design and management procedures for minimizing erosion from furrow irrigated cropland. ASAE Paper 84-2595. ASAE, St. Joseph, MI.

19. Gabriels, D. 1990. Application of soil conditioners for agriculture and engineering. *IN* Soil Colloids and their associations in aggregates. M.F. De Boodt, M. Hayes, and A. Herbillon (eds.). Plenum Press, New York, pp. 557-565.

20. Gleick, P.H. 1993. An introduction to global fresh water issues. *IN* Gleick, P.H. (ed.) Water in Crisis. Oxford University Press. New York. 473 pages.

21. Goodrich, M.S., L.H. Dulak, M.A. Freidman, and J.J. Lech. 1991. Acute and long term toxicity of water-soluble cationic polymers to rainbow trout (*Oncorhynchus mykiss*) and the modification of toxicity by humic acid. *Environ. Toxicol. Chem.* 10:509-551.

22. Hoffman, G.J., T.A. Howell and K.H. Solomon (eds.) 1990. Management of Farm Irrigation Systems. 1040 pages. ASAE, St. Joseph, MI.

23. Kay-Shoemaker, J.L., and M.E. Watwood. 1996. The role of amidase in microbial utilization of PAM as an N-source. *IN* (R.E. Sojka and R.D. Lentz, eds.) Proceedings: Managing irrigation-induced erosion and infiltration with polyacrylamide. College of Southern Idaho, Twin Falls, ID 6-8 May, 1996.

24. Kemper, W.D., T.J. Trout, M.J. Brown, and R.C. Rosenau. 1985. Furrow erosion and water and soil management. *Trans. ASAE* 28:1564-1572.

25. Lentz, R.D., I. Shainberg, R.E. Sojka and D.L. Carter. 1992. Preventing irrigation furrow erosion with small applications of polymers. *Soil Sci. Soc. Am. J.* 56:1926-1932.

26. Lentz, R.D., R.E. Sojka, and D.L. Carter. 1993. Influence of polymer charge type and density on polyacrylamide ameliorated irrigated furrow erosion. *IN* Proc., 24th Annual International Erosion Control Association Conference, 23-26 Feb., 1993, Indianapolis, IN, pages 159-168.

27. Lentz, R.D., and R.E. Sojka. 1994a. Automated Imhoff cone calibration and soil loss/infiltration analysis for furrow irrigation studies. p. 858-863. *IN* D.G. Watson, F.S. Sasueta and T.V. Harrison (eds.) Computers in Agriculture 1994: Proc. 5th Internat'l Conf. on Computers in Agriculture. Orlando, FL 5-9 Feb., 1994. ASAE, St. Joseph, MI.

28. Lentz, R.D. and R.E. Sojka. 1994b. Field results using polyacrylamide to manage furrow erosion and infiltration. *Soil Science.* 158:274-282.

29. Lentz, R.D., T.D. Steiber, and R.E. Sojka. 1995. Applying polyacrylamide (PAM) to reduce erosion and increase infiltration under furrow irrigation. *IN*: Robertson, L.D., Nolte, P., Votraska, B., King, B., Tindall, T., Romanko, R. and Gallian, J. (eds.). Proc. Winter Commodity Schools--1995. pages 79-92. University of Idaho Cooperative Extension, Moscow, ID.

30. Lentz, R.D., and R.E. Sojka. 1995. Monitoring software for pollutant components in furrow irrigation runoff. p. 123-127. *IN* L. Ahuja, J. Leppert, K. Rojas, and E. Seely (eds.) Proc. Workshop on Computer Applications in Water Management, 23-25 May, 1995, Colorado State University Water Resources Research Institute Info. series No. 79.

31. Lentz, R.D. 1995. Irrigation: Use of water soluble polyacrylamide to control furrow irrigation-induced erosion. p. 162-165. *IN* S.P. Parker (ed.) Yearbook of Science and Technology 1996. McGraw Hill, Inc. NY.

32. Lentz, R.D., and R.E. Sojka. 1996a. Polyacrylamide application to control furrow irrigation-induced erosion. Proceedings of the 27th International Erosion Control Association meetings, pages 419-430. Seattle Washington, 27 Feb.-1 Mar., 1996.

33. Lentz, R.D., and R.E. Sojka. 1996b. Five-year research summary using PAM in furrow irrigation. *IN* (R.E. Sojka and R.D. Lentz, eds) Proceedings: Managing irrigation-induced erosion and infiltration with polyacrylamide. College of Southern Idaho, Twin Falls, ID 6-8 May, 1996.

34. Lentz, R.D., and R.E. Sojka. 1996c. Determining the dry PAM application rate applied to head ditch or pipe flow. USDA-ARS Northwest Irrigation & Soils Research Lab Station Note #01-96.

35. Lentz, R.D., and R.E. Sojka. 1996d. Determining dry PAM amounts applied directly in individual furrows. USDA-ARS Northwest Irrigation & Soils Research Lab Station Note #02-96.

36. Lentz, R.D., and R.E. Sojka. 1996e. Determining dry PAM amounts applied directly in individual furrows. USDA-ARS Northwest Irrigation & Soils Research Lab Station Note #03-96.

37. Lentz, R.D., and R.E. Sojka. 1996f. Determining the PAM field application rate for various irrigation conditions, when the PAM-treated furrow advances 0-12 hours. USDA-ARS Northwest Irrigation & Soils Research Lab Station Note #04-96.

38. Lentz, R.D., R.E. Sojka and J.A. Foerster. 1996. Measuring polyacrylamide in irrigation water with a flocculation test. *J. Environ. Qual.* (In Press).

39. MacWilliams, D.C. 1978. Acrylamides. *IN* Encyclopedia of chemical technology, 3rd. Ed., vol 1. I. Kirk and D.F. Othmer (eds.). Wiley, New York, pp. 298-311.

40. Malik, M., A. Nadler, and J. Letey. 1991. Mobility of polyacrylamide and polysaccharide polymer through soil materials. *Soil Technol.* 4:255-263.

41. Malik, M., and J. Letey. 1992. Pore-size-dependent apparent viscosity for organic solutes in saturated porous media. *Soil Sci. Soc. Am. J.* 56:1032-1035.

42. McCutchan, H., P. Osterli, and J. Letey. 1994. Polymers check furrow erosion, help river life. *Calif. Ag.* 47:10-11.

43. Mitchell, A.R. 1986. Polyacrylamide application in irrigation water to increase infiltration. *Soil Sci.* 141:353-358.

44. Rangeley, W.R. 1987. Irrigation and drainage in the world. p.29-35. *IN* Proc. Water and Water Policy in World Food Supplies

Conf. W.R.Jordan (ed.). College Station: Texas A & M Univ. Press.

45. Ross, M.A., and C.A. Lembi. 1985. Applied Weed Science. 340 pages. McMillan and Company. New York.
46. Ross, C.W., R.E. Sojka, R.D. Lentz. 1996. Polyacrylamide as a tool for controlling sediment runoff and improving infiltration under furrow irrigation. Proceedings Australia & New Zealand National Soils Conference, Melbourne, Australia. July, 1996. (In Press).
47. Paganyas, K.P. 1975. Results of the use of series "K" compounds for the control of irrigational soil erosion. Sov. Soil Sci. 5:591-598.
48. Seybold, C.A. 1994. Polyacrylamide review: Soil conditioning and environmental fate. Comm. Soil Sci. Plant. Anal. 25:2171-2185.
49. Singh, G., J. Letey, P. Hanson, P. Osterli, and W.F. Spencer. 1996. Soil erosion and pesticide transport from an irrigated field. J. Environ. Sci. Health B31 (1), 25-41.
50. Sojka, R.E., Carter, D.L. and M.J. Brown. 1992. Imhoff cone determination of sediment in irrigation runoff. Soil. Sci. Soc. Am. J. 56:884-890.
51. Sojka, R.E., and R.D. Lentz. 1993. Improving water quality of returnflows in furrow-irrigated systems using polymer-amended inflows. Proceedings of the SWCS Conference on Agricultural Research to Protect Water Quality, 21-24 Feb., 1993. Minneapolis, Minn, pp. 395-397.
52. Sojka, R.E. and R.D. Lentz. 1994a. Net infiltration and soil erosion effects of a few ppm polyacrylamide in furrow irrigation water. p. 349-354. *In*: So, H.B., Smith, G.D., Raine, S.R., Schafer, B.M., and Loch R.J. (eds.) Sealing, Crusting and Hardsetting Soils: Proc. 2nd Internat'l Symposium. 7-11 Feb., 1994. University of Queensland, Brisbane, Australia.
53. Sojka, R.E. and R.D. Lentz. 1994b. Polyacrylamide (PAM): A new weapon in the fight against Irrigation-induced erosion. USDA-ARS Soil and Water Management Research Unit, Station Note #01-94.
54. Sojka, R.E., R.D. Lentz and J.A. Foerster. 1994. Software utilizing Imhoff cone volumes to estimate furrow-irrigation erosion. J. Soil and Water Cons. 49:400-406.
55. Sojka, R.E., R.D. Lentz, and D.T. Westermann. 1995. Water and erosion management with PAM in furrow irrigated potatoes. page 284. Agronomy Abstracts 1995.
56. Sojka, R.E., R.D. Lentz, C.W. Ross, and T.J. Trout. 1996. Net and tension infiltration effects with PAM in furrow irrigation. *In* (R.E. Sojka and R.D. Lentz, eds) Proceedings: Managing irrigation-induced erosion and infiltration with polyacrylamide. College of Southern Idaho, Twin Falls, ID 6-8 May, 1996.
57. Sojka, R.E., and R.D. Lentz. 1996. Polyacrylamide for furrow-irrigation erosion control. Irrig. J. 46:8-11.
58. Sojka, R.E. 1996. Irrigation. In Sybil Parker (ed) 1997 Yearbook of Science and Technology. McGraw Hill, New York. (In Press).
59. Sojka, R.E. 1997. Research contribution to the understanding and management of irrigation-induced erosion. 50th Anniversary Symposium on Soil Conservation Research. J. Soil Water Conserv. Special Pub. F.J. Pierce (ed) (In Press).
60. Tribe, D. 1994. Feeding and Greening the World, the Role of Agricultural Research. 274 pages. CAB International. Wallingford, Oxon, UK.
61. Trout, T.J., R.E. Sojka and R.D. Lentz. 1995. Polyacrylamide effect on furrow erosion and infiltration. Trans. ASAE. 38(3):761-765.
62. Trout, T.J., and R.D. Lentz. 1993. Polyacrylamide decreases furrow erosion. *In*: R.G. Allen and C.M.U. Neale (eds.) Management of Irrigation and Drainage Systems: Integrated Perspectives. Proceedings of the 1993 Nat'l Conf. on Irrig. and Drainage Engineering. Park City, UT, 21-23 July.
63. Trout, T.J. 1996. Furrow irrigation erosion and sedimentation: on-field distribution. Trans. ASAE (In Press)
64. Watwood, M.E., and J.L. Kay-Shoemaker. 1996. Microbial ecology of polyacrylamide application in agricultural soils. *In* (R.E. Sojka and R.D. Lentz, eds.) Proceedings: Managing irrigation-induced erosion and infiltration with polyacrylamide. College of Southern Idaho, Twin Falls, ID 6-8 May, 1996.
65. Wilson, A.D. and S. Crisp. 1975. Rigid highly carboxylated ionic polymers. *In* Ionic Polymers. L. Holiday (ed.). Chapman and Hall, New York, pp 208-257.

1. Soil Scientists, USDA-Agricultural Research Service, Northwest Irrigation and Soils Research Laboratory, 3793 N. 3600 E. Kimberly, ID 83341.

2. Mention of trademarks, proprietary products, or vendors neither constitutes a guarantee or warranty of the product by the USDA-Agricultural Research Service nor implies its approval to the exclusion of other suitable products or vendors.

Submitted: 03-18-1997

Last Modified: 08/14/2009